







DRAWING FOR CUSTOMER

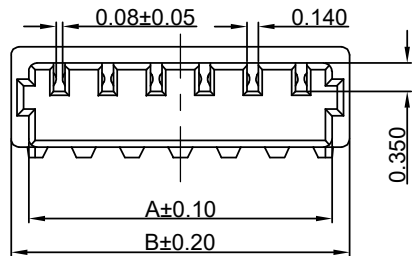


APPLICABLE WIRE:AWG#34、AWG#36

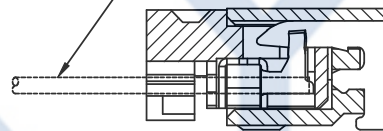

MATED CONDITION

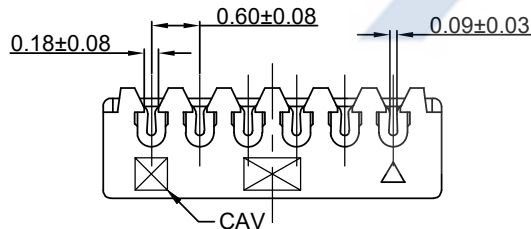

膜厚测点位置

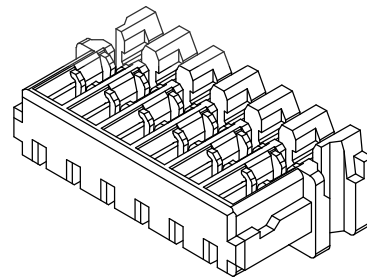

■SPEC.:

- Rated Voltage:30V AC,DC
- Rated Current:0.2A AC,DC(AWG #36)
0.3A AC,DC (AWG #34)
- Withstand Voltage:200V AC/minute
- Contact Resistance:30mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-25℃~+85℃

■Material:

- Insulator:LCP, UL94V-0
- Contact:Phosphor Bronze
- Applicable wire:AWG#36;AWG34
- Insulation O.D:Ø0.32±0.02mm(AWG#34)
Ø0.29mm(AWG#26)

KB601-XX H XX T 5 A

Pin No.

Housing

10:Tin plated

11:Gold plated

Version

Mold No.

Terminal

Poles	Dimensions(mm)			
	A	B	C	D
02	1.36	1.80	0.60	1.65
04	2.56	3.00	1.80	2.85
05	3.16	3.60	2.40	3.45
06	3.76	4.20	3.00	4.05
07	4.36	4.80	3.60	4.65
08	4.96	5.40	4.20	5.25
10	6.16	6.60	5.40	6.45
12	7.36	7.80	6.60	7.65
14	8.56	9.00	7.80	8.85
16	9.76	10.20	9.00	10.05

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-04-12	A		KB601-XXHXXT5A	Devin
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	Devin
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas
	APPROVED 核准	William

KB601-XXHXXT5A	
PART NO. 料號	
DWG NO. 圖號	PE211102A



UNIT
單位

mm

PRODUCT NAME
產品名稱

XSR PH0.6mm Wire To Board
Connector No Ear