


DRAWING FOR CUSTOMER

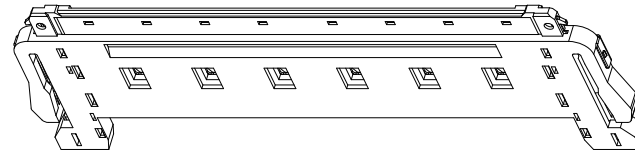

■SPEC.:



- Rated Voltage:200V AC,DC
- Rated Current:0.5A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:40mΩ max
- Insulation Resistance:100MΩ min
- Temperature Range:-40℃~+80℃

■Material:

- Insulator: LCP UL94V-0 ,
Color:Black
- Lower Shell:Stainless steel
- Lock Spring:Stainless steel

KB803-40 H L F 1 A -C2

Pin No.	LCP BK
Housing	Version
With Lock	Mold No.
	Solder

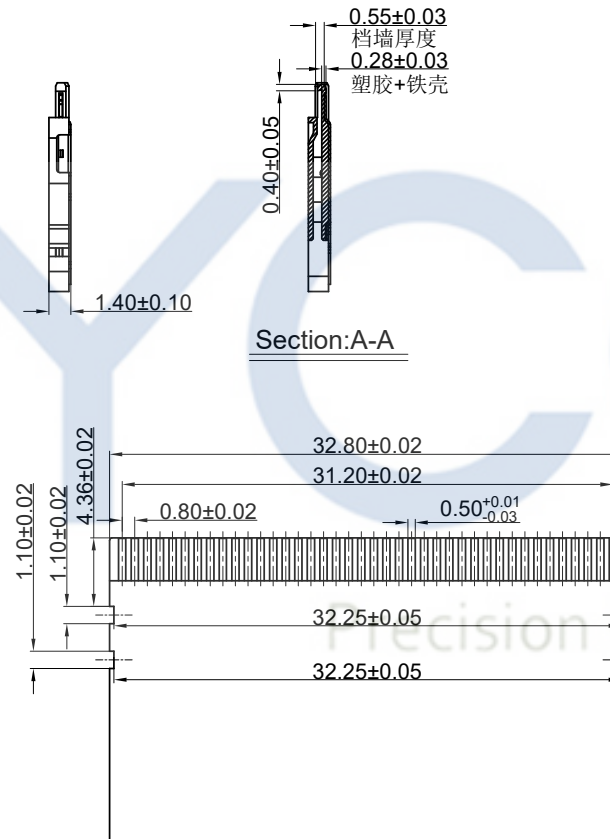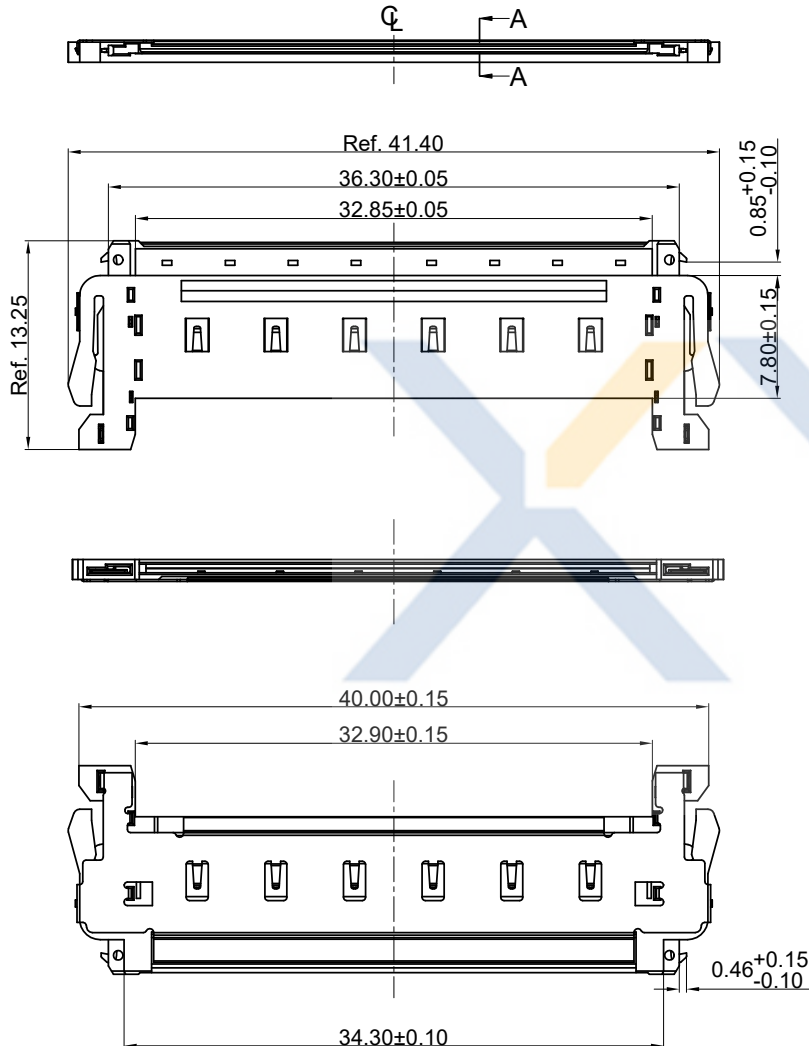

Recommended FFC Dimension

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2024-11-22	A	新版发行	KB803-40HLF1A-C2	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB803-40HLF1A-C2
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Leo Li	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE2104004A



UNIT
單位

mm

PRODUCT NAME
產品名稱

FI-NX 40P Wire To Board FFC Type
Connector