

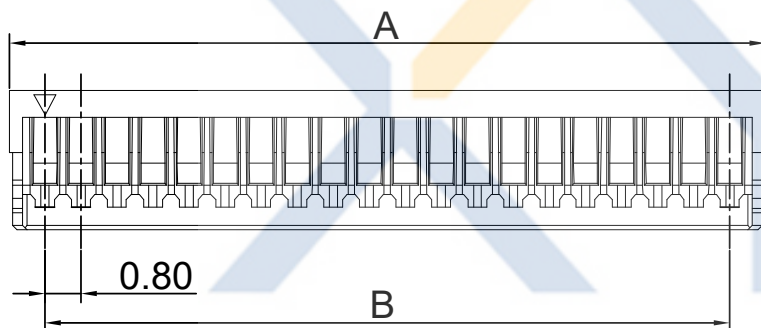


DRAWING FOR CUSTOMER



■SPEC.:


- Rated Voltage: 30V AC,DC
- Rated Current: 1.0A AC,DC
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 30mΩ max
- Insulation Resistance: 100MΩ min
- Temperature Range: -25°C~+85°C

■Material:

- Insulator:B1-PA66 UL94V-0

KB802-XXH6A-B1

Pin No. Material
Housing Version
 Mold No.



Poles	Dimensions(mm)	
	A	B
02	2.40	0.80
03	3.20	1.60
04	4.00	2.40
05	4.80	3.20
06	5.60	4.00
08	7.20	5.60
10	8.80	7.20
12	10.40	8.80
14	12.00	10.40
16	13.60	12.00
17	14.40	12.80
20	16.80	15.20

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2016-11-25	A		KB802-XXH6A-B1	Devin	TOLERANCE 公差	DRAWING 設計者	Devin	KB802-XXH6A-B1	
DATE 日期	VER 版本		CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	
						APPROVED 核准	William	DWG NO. 圖號	PE200705A

UNIT 單位	mm	PRODUCT NAME 產品名稱	SUH PH0.80mm Wire to Board Housing No ear
------------	----	----------------------	--