DRAWING FOR CUSTOMER



2*25PIN 双凸点

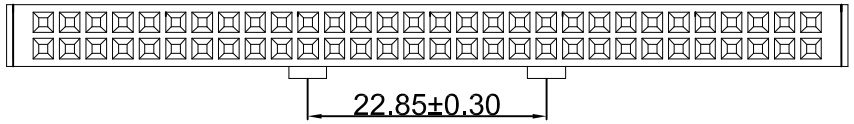

2*30PIN 双凸点

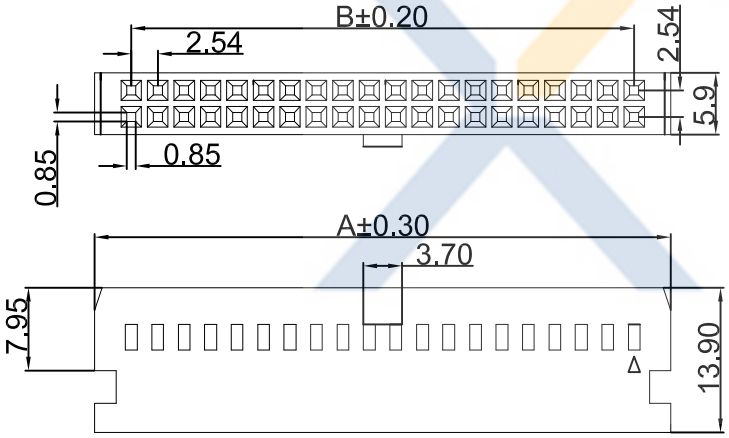

2*5~2*20PIN 单凸点

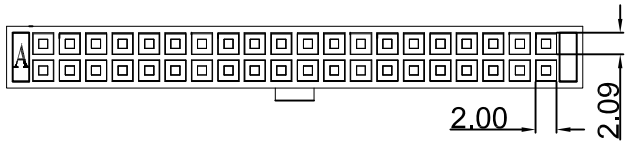

■SPEC.:
- ●Voltage Rating:250V AC/DC
- ●Current Rating:3A AC/DC
- ●Dielectric Strength :1500V AC/minute
- ●Insulation Resistance:1000MΩ min.
- ●Temperature Range:-25°C to+85°C.
- ●Contact Resistance:20mΩ max.

■HOUSING:
- ●Material:PBT /PA66 UL94V-0
- ●Color:Black

KB9510-D XX H T 6 A

- Double row
- Pin No.
- Housing
- T:Protruding Point
- Mold No.
- Version

Part No.	Dimension	
	A(mm)	B(mm)
2*5	17.25	10.16
2*7	22.35	15.24
2*8	24.80	17.78
2*10	29.95	22.86
2*13	37.55	30.48
2*15	42.63	30.56
2*17	47.75	40.64
2*20	55.35	48.26
2*25	68.04	60.96
2*30	80.77	73.66

XYCO Precision Connectors

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2015-06-10	A		KB9510-DXXHT6A	Devin

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者: Devin
CHECKED 審查: Thomas
APPROVED 核准: William

PART NO. 料號: KB9510-DXXHT6A
DWG NO. 圖號: PE191201A

UNIT 單位: mm

PRODUCT NAME 產品名稱: 2.54mm Pitch Dual Row Protruding Point Housing

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn