
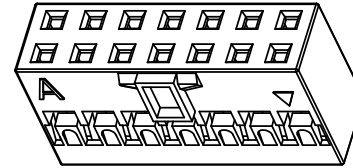


# DRAWING FOR CUSTOMER



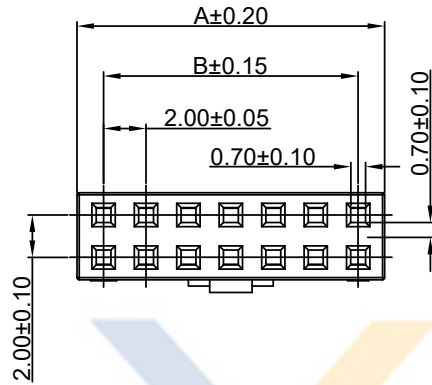


■SPEC.:




- Voltage Rating:250V AC/DC
- Current Rating:2A AC/DC
- Dielectric Strength :500V AC/minute
- Contact Resistance:20mΩ max.
- Insulation Resistance:1000MΩ min.
- Temperature Range:-25°C to+85°C.

■Material:

- Insulator:PA66 UL94V-0;
- Color:Black



(帶LOGO料号:KB931-DXXHT1F-2X)  
(不帶LOGO料号:KB931-DXXHT1F-2)

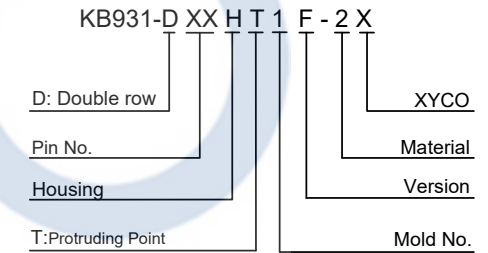

Precision Connectors

Poles	Dimensions(mm)	
	A	B
2X06	12.50	10.00
2X07	14.50	12.00

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差 .X=±0.30 .XX=±0.20 .XXX=±0.10	DRAWING 設計者	Devin	KB931-DXXHT1F-2X
2026-01-20	F	增加飞机扣结构	KB931-DXXHT1F-2X	Devin		CHECKED 審查	Leo Li	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號 PE260101A

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981 http://www.XYCO.com.cn

UNIT 單位	mm	PRODUCT NAME 產品名稱	DP2.0 Wire to Board Housing With Protruding Point
------------	----	----------------------	--