
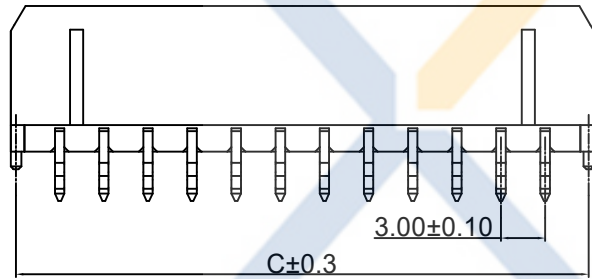

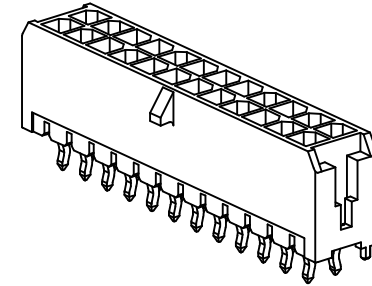




DRAWING FOR CUSTOMER

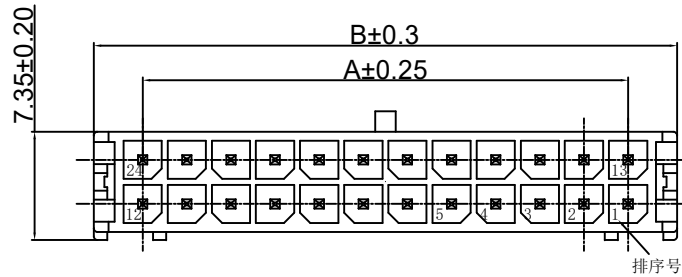

- SPEC.:
- Rated Voltage: 250V AC, DC
 - Rated Current: 5A AC, DC
 - Withstand Voltage: 1500V AC/minute
 - Insulation Resistance: 1000MΩ min
 - Contact Resistance: 15mΩ Max.
 - Temperature Range: -40°C ~ +105°C

- Notes:
- Insulation Material: P7-PA10T UL94-V0 HF
Color: BK-Black
 - Contact Material: Brass
Finish: Tin-plated; Over Nickel-plated

Poles	Dimensions		
	A	B	C
2*01	—	6.6	6.0
2*02	3.0	9.6	9.0
2*03	6.0	12.6	12.0
2*04	9.0	15.6	15.0
2*05	12.0	18.6	18.0
2*06	15.0	21.6	21.0
2*07	18.0	24.6	24.0
2*08	21.0	27.6	27.0
2*09	24.0	30.6	30.0
2*10	27.0	33.6	33.0
2*11	30.0	36.6	36.0
2*12	33.0	39.6	39.0

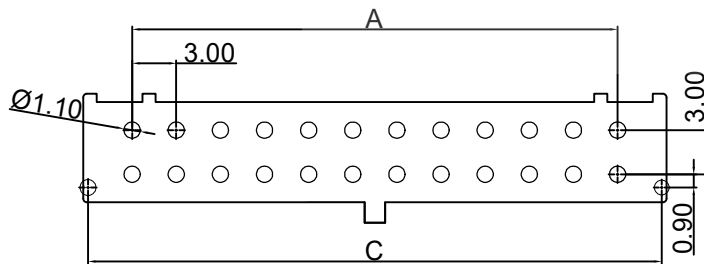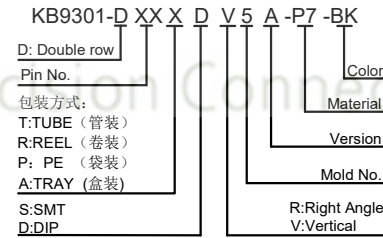

Board Layout
General Tolerance: ±0.05

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981 <http://www.XYCO.com.cn>

2015-11-16		A	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB9301-DXXXDV5A-P7-BK		UNIT 單位	mm	PRODUCT NAME 產品名稱	PH3.0mm Double Row DIP Vertical Wafer
DATE 日期	VER 版本	2015-11-16				A	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Leo Li	PART NO. 料號				
								APPROVED 核准	William					