
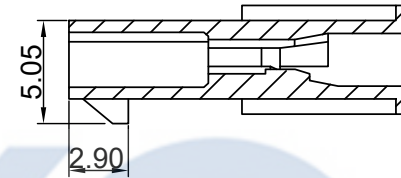


# DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:250V AC,DC
  - Rated Current:5A AC,DC
  - Withstand Voltage:1000V AC/minute
  - Contact Resistance:10mΩ max
  - Insulation Resistance:1000MΩ min
  - Temperature Range:-25°C~+85°C



- Material:
- Insulator:PA66 UL94V-2
  - Color:WH-White,BK-Black

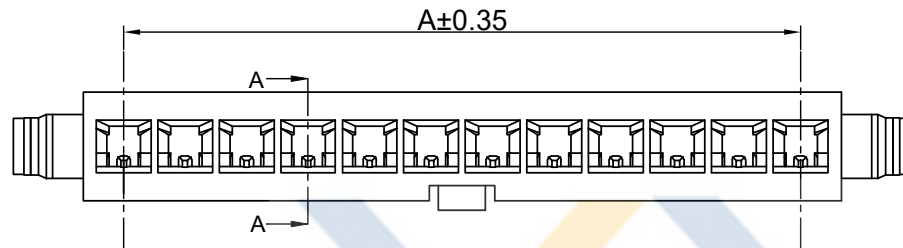

Section:A-A

KB9302-XXHL6A-XX

Pin No.      Color  
 Housing      Version  
                     Mold No.  
                     With Lock

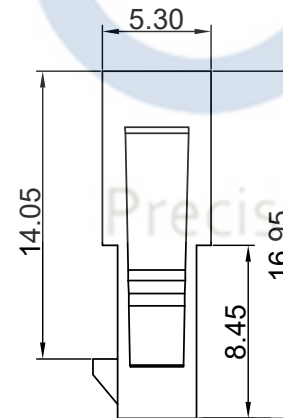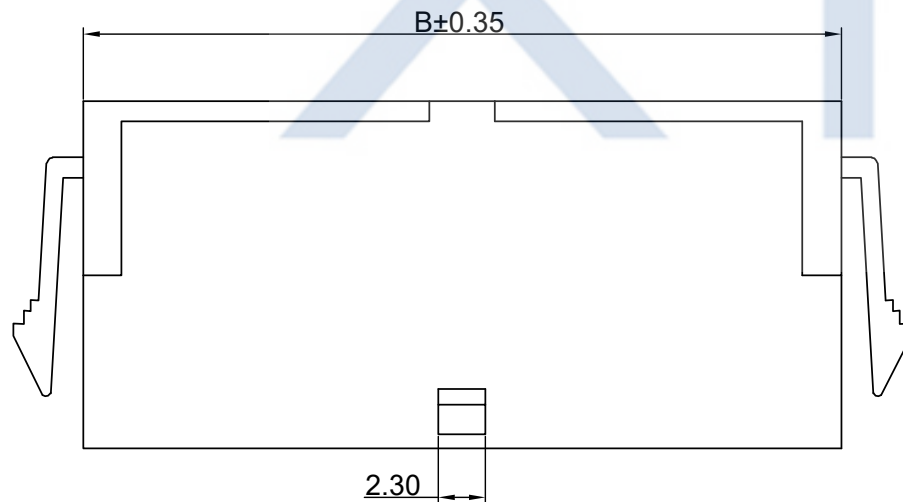

Poles	Dimensions(mm)	
	A	B
02	3.00	7.00
03	6.00	10.00
04	9.00	13.00
05	12.00	16.00
06	15.00	19.00
07	18.00	22.00
08	21.00	25.00
09	24.00	28.00
10	27.00	31.00
11	30.00	34.00
12	33.00	37.00

**XYCO** 东莞市轩业电子科技有限公司  
 TEL: 0769-8297 9981    http://www.XYCO.com.cn

TOLERANCE 公差					DRAWING 設計者	Devin	KB9302-XXHL6A-XX			
2015-10-16	A	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	CHECKED 審查	Leo Li	PART NO. 料號			
DATE 日期	VER 版本				APPROVED 核准	William	DWG NO. 圖號	PE211206A	UNIT 單位	mm
									PRODUCT NAME 產品名稱	43640 PH3.0mm Wire To Wire Single row Housing-Female

UNIT 單位	mm	PRODUCT NAME 產品名稱	43640 PH3.0mm Wire To Wire Single row Housing-Female
---------	----	-------------------	--