# DRAWING FOR CUSTOMER




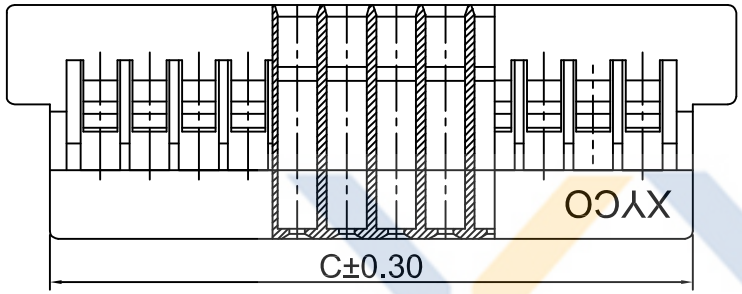


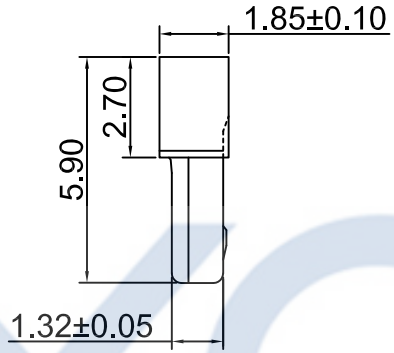


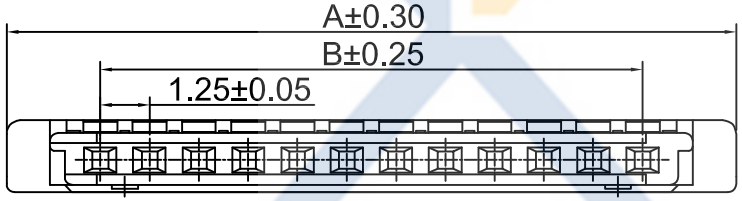


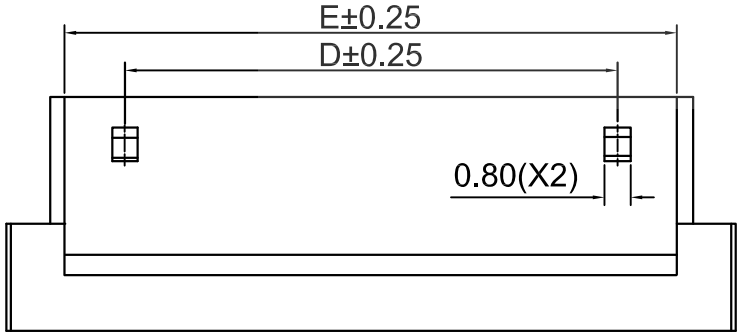


07~30
双凸



02~06
单凸

■SPEC.:
- ●Rated Voltage:200V AC,DC
- ●Rated Current:1A AC,DC
- ●Withstand Voltage:500V AC/minute
- ●Contact Resistance:40mΩ max
- ●Insulation Resistance:100MΩ min
- ●Temperature Range:-25℃~+85℃

■Material:
- ●Insulator:PA66 UL94-V0
  Color:BK-(Black);WH-(White)

KB913-X X H 6 A-XX-X

- Pin No.
- Housing
- Mold No.
- XYCO
- Color
- Version

| Poles | Dimensions(mm) | | | | |
|---|---|---|---|---|---|
| | A | B | C | D | E |
| 02 | 6.00 | 1.25 | 3.80 | | 3.20 |
| 03 | 7.25 | 2.50 | 5.05 | | 4.45 |
| 04 | 8.50 | 3.75 | 6.30 | | 5.70 |
| 05 | 9.75 | 5.00 | 7.55 | | 6.95 |
| 06 | 11.00 | 6.25 | 8.80 | | 8.20 |
| 07 | 12.25 | 7.50 | 10.05 | 3.20 | 9.45 |
| 08 | 13.50 | 8.75 | 11.30 | 3.20 | 10.70 |
| 09 | 14.75 | 10.00 | 12.55 | 3.20 | 11.95 |
| 10 | 16.00 | 11.25 | 13.80 | 3.20 | 13.20 |
| 11 | 17.25 | 12.50 | 15.05 | 4.70 | 14.45 |
| 12 | 18.50 | 13.75 | 16.30 | 4.70 | 15.70 |
| 13 | 19.75 | 15.00 | 17.55 | 4.70 | 16.95 |
| 14 | 21.00 | 16.25 | 18.80 | 4.70 | 18.20 |
| 15 | 22.25 | 17.50 | 25.05 | 4.70 | 19.45 |
| 20 | 26.90 | 23.75 | 26.30 | 4.70 | 25.70 |
| 25 | 33.15 | 30.00 | 32.55 | 5.70 | 31.95 |
| 30 | 39.40 | 36.25 | 38.80 | 5.70 | 38.20 |

Precision Connector

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

| DATE 日期 | VER 版本 | CHANGE HISTORY 變更歷史 | CHANGED NAME 修改後料號 | DRAWING 變更者 |
|---|---|---|---|---|
| 2016-08-30 | A | | KB913-XXH6A-XX-X | Devin |

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

| | | | |
|---|---|---|---|
| DRAWING 設計者 | Devin | KB913-XXH6A-XX-X | |
| CHECKED 審查 | Thomas | PART NO. 料號 | |
| APPROVED 核准 | William | DWG NO. 圖號 | PE191003A |

UNIT 單位: mm

PRODUCT NAME 產品名稱: FI-S PH1.25mm Wire To Board Housing