


# DRAWING FOR CUSTOMER

■SPEC.:


- Voltage Rating: 100V AC/ DC
- Current Rating: 1A AC/ DC
- Withstanding Voltage: 300V AC/Minute
- Contact Resistance: 30mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range: -25°C~+85°C

■Material:

- Insulator:PBT UL94V-0
- Color:Natural

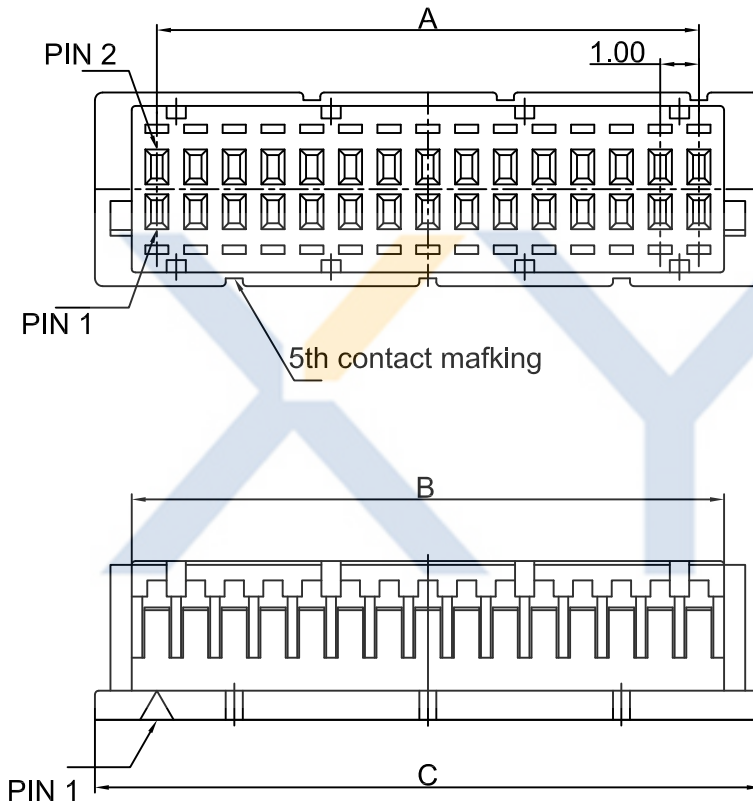

KB9908-D X X H 5 A  
 Double row Pin No. Housing Version Mold No.



Poles	Dimensions(mm)		
	A	B	C
30	14.00	15.30	17.20
40	19.00	20.30	22.20

**XYCO** 东莞市轩业电子科技有限公司  
 TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB9908-DXXH5A
2015-03-12	A		KB9908-DXXH5A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE1712020A

UNIT 單位	mm	PRODUCT NAME 產品名稱	DF20 PH1.00mm Wire To Board Double row Housing