


# DRAWING FOR CUSTOMER

- SPEC.:
- Rated Voltage:100V AC,DC
  - Rated Current:1A AC,DC
  - Withstand Voltage:500V AC/minute
  - Contact Resistance:20mΩ max
  - Insulation Resistance:500MΩ min
  - Temperature Range:-25℃~+85℃


- Material:
- Insulator(A):PA66 UL94V-0
  - Contact Pin(B):Brass
  - Finish: Tin plated over Nickel

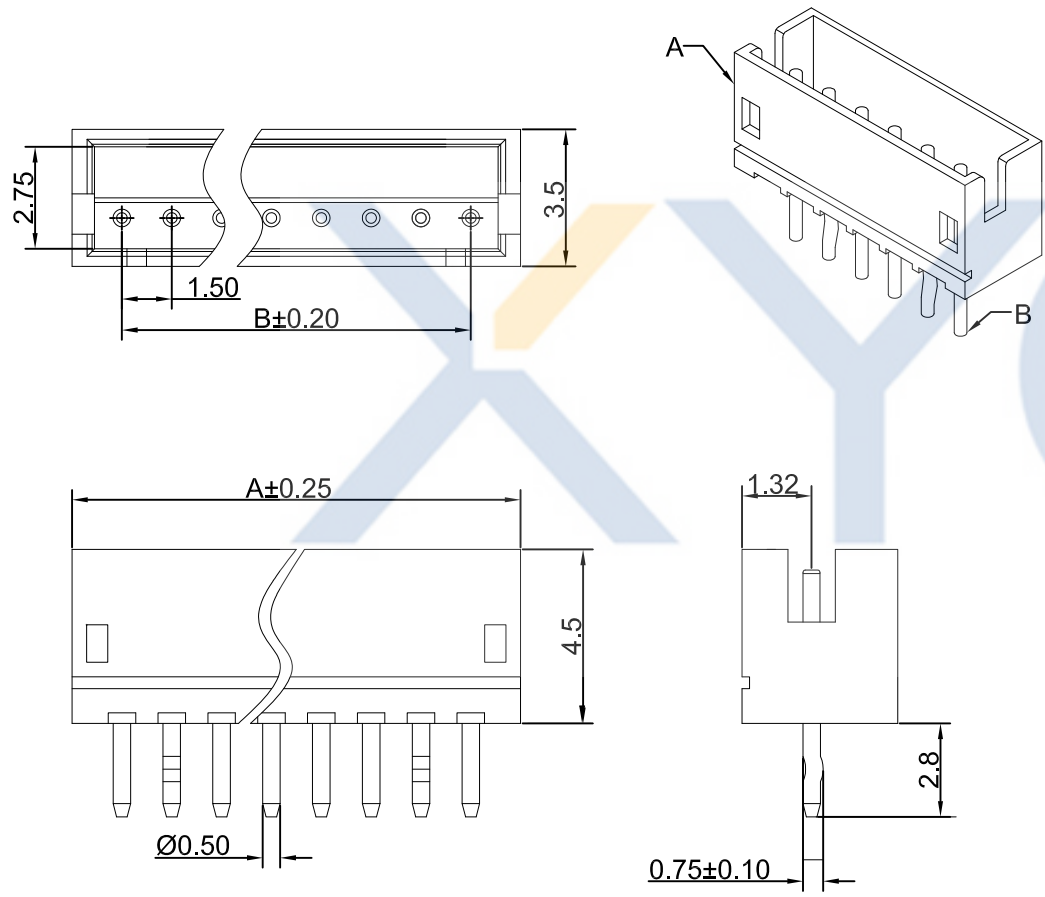

KB924-XX X D V 7 A

Pin No.      Version  
                     Mold No.  
                     R:Right Angle  
                     V:Vertical  
                     S:SMT  
                     D:DIP

包装方式:  
 T:TUBE (管装)  
 R:REEL (卷装)  
 P: PE (袋装)

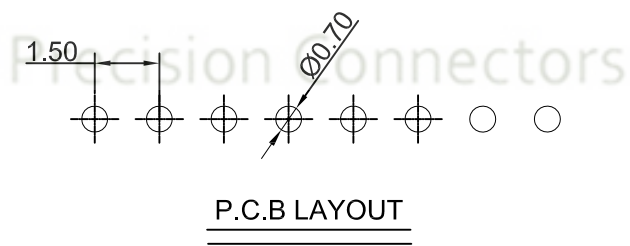

Poles	Dimensions (mm)	
	A	B
02	4.50	1.50
03	6.00	3.00
04	7.50	4.50
05	9.00	6.00
06	10.50	7.50
07	12.00	9.00
08	13.50	10.50
09	15.00	12.00
10	16.50	13.50
11	18.00	15.00
12	19.50	16.50
13	21.00	18.00

**XYCO** 东莞市轩业电子科技有限公司  
 TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	Devin	KB924-XXXDV7A
2015-10-09	A		KB924-XXXDV7A	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號 PE1804002A

UNIT 單位	mm	PRODUCT NAME 產品名稱	ZH PH1.5mm Wire To Board Dip Vertical Wafer
UNIT 單位	mm	PRODUCT NAME 產品名稱	ZH PH1.5mm Wire To Board Dip Vertical Wafer