

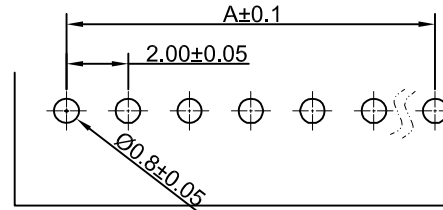
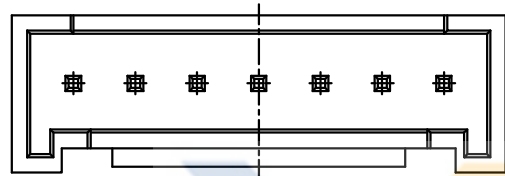


DRAWING FOR CUSTOMER

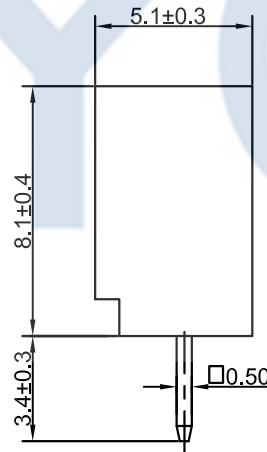

P.C.B Layout

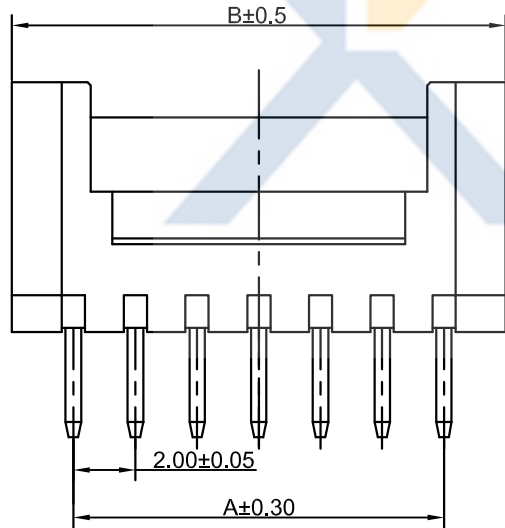

■Specifications:

- Rated Voltage:125V AC,DCm
- Rated Current: 2A AC,DC
- Withstand Voltage: 1000V AC/minute
- Contact Resistance: 20mΩ(MAX.)
- Insulation Resistance: 1,000Ω, (MIN.)
- Temperature Range: -25°C~+85°C

■Material :

- Insulator : Nylon 66 UL94V-0
- Contact Pin:Brass

KB935-XX X D V 5 A

Pin No.

Version
Mold No.

包裝方式:

- T:TUBE (管装)
- R:REEL (卷装)
- P: PE (袋装)


- R:Right Angle
- V:Vertical
- S:SMT
- D:DIP

Poles	Dimensions		Poles	Dimensions	
	A	B		A	B
2P	2.00	6.00	10P	18.00	22.00
3P	4.00	8.00	11P	20.00	24.00
4P	6.00	10.00	12P	22.00	26.00
5P	8.00	12.00	13P	24.00	28.00
6P	10.00	14.00	14P	26.00	30.00
7P	12.00	16.00	15P	28.00	32.00
8P	14.00	18.00	16P	30.00	34.00
9P	16.00	20.00			

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

2015-11-30	A		KB935-XXXDV5A	John	TOLERANCE 公差	DRAWING 設計者	John	KB935-XXXDV5A	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號	UNIT 單位
						APPROVED 核准	William	DWG NO. 圖號	mm
								PE1808007A	PRODUCT NAME 產品名稱



JST PHS PH2.0mm Wire To Board
DIP Vertical Wafer