DRAWING FOR CUSTOMER



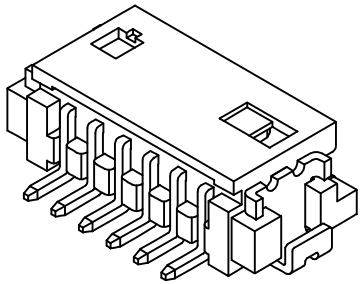



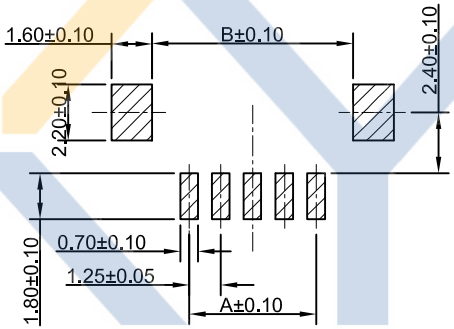

P.C.B LAYOUT

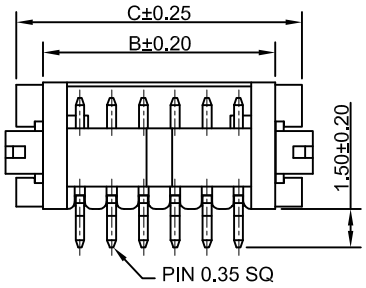



■SPEC.:
- Rated Voltage:150V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:500V AC/minute
- Contact Resistance:30mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-25℃~+85℃
- Pin Material:Brass/Gold-flash
- Solder Tabs:Phosphor Bronze/Gold-flash
- Material:Nylon 6T UL94-V0
- Pantone color: Natural

KB911- XX X S R 5 A

- Pin No.
- T:TUBE 管裝
- R:REEL卷裝
- P:PE 袋裝
- R:Right angle
- V:Vertical
- S:SMT
- D:DIP
- Version
- Mold No.

poles	Dimensions		
	A	B	C
02	1.25	4.15	6.25
03	2.50	5.40	7.50
04	3.75	6.65	8.75
05	5.00	7.90	10.00
06	6.25	9.15	11.25
07	7.50	10.40	12.50
08	8.75	11.65	13.75
09	10.00	12.90	15.00
10	11.25	14.15	16.25
11	12.50	15.40	17.50
12	13.75	16.65	18.75
13	15.00	17.90	20.00
14	16.25	19.15	21.25
15	17.50	20.40	22.50

XYCO Precision Connectors

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2015-06-21	A		KB911-XXXSR5A	John

TOLERANCE 公 差	.X=±0.25 .XX=±0.15 .XXX=±0.05	DRAWING 設計者	John
		CHECKED 審查	Thomas
		APPROVED 核准	William

KB911-XXXSR5A	
PART NO. 料號	
DWG NO. 圖號	PE1807039A

UNIT 單位: mm

PRODUCT NAME 產品名稱: HRS DF13 PH1.25mm SMT Right Angle Wafer

XYCO PRECISION CONNECTORS
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn