DRAWING FOR CUSTOMER

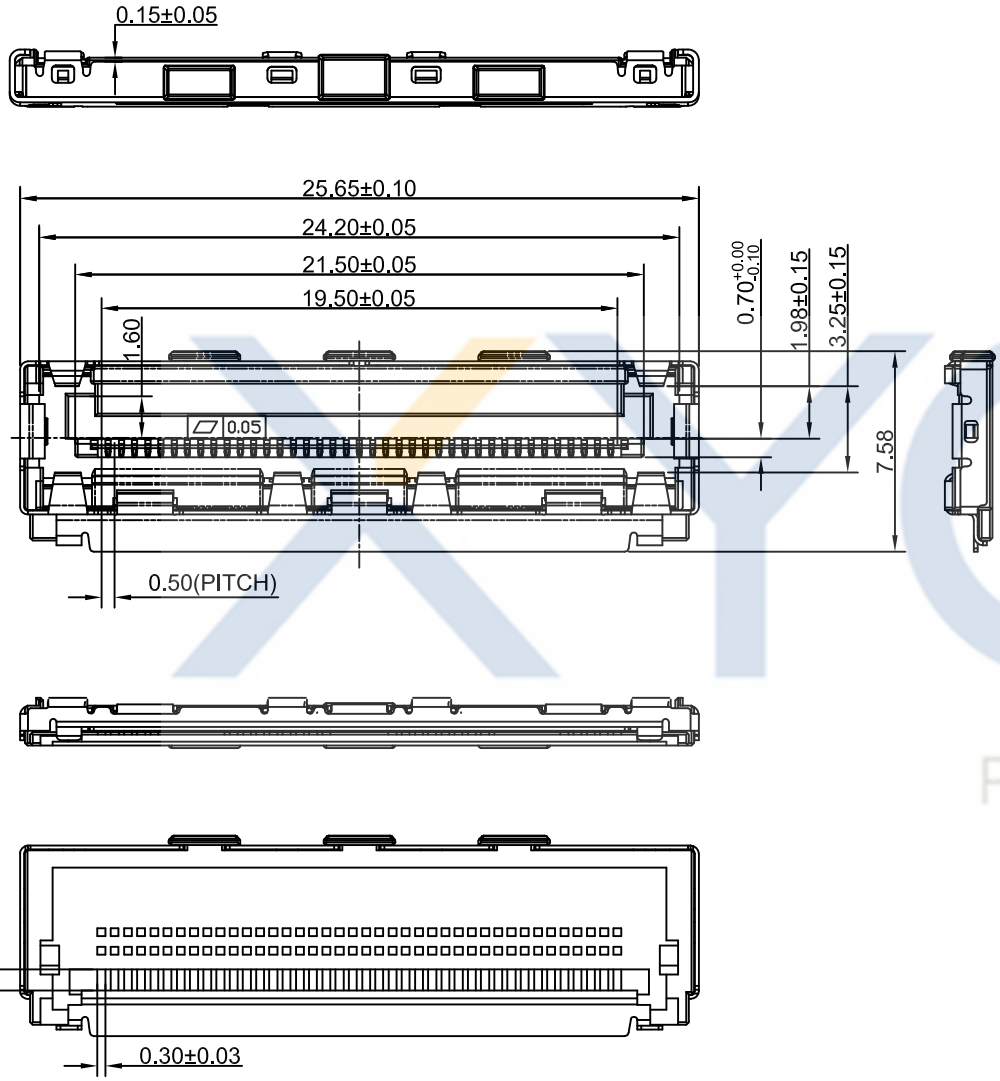

■Specifications :

- ●Current : Rating : 0.2~0.3A AC/DC
- ●Voltage Rating : 50V AC/DC
- ●Contact Resistance : 80mΩ Max.
- ●Dielectnic Withstanding Voitage: 150V AC/DC
- ●Insulation Resistance: 250MΩ MIN
- ●Operating Temperature: -55°C to +85°C

■Material:

- ●Terminal : Copper alloy T=0.12mm
  Plating : plating Au 5u" over Nick
- ●Top-Shell : Copper alloy T=0.15mm
  Plating : plating Sn 80u" over Nick
- ●Under-Shell : Copper alloy T=0.20mm
  Plating : plating Sn 80u" over Nick
- ●Housing: Thermoplastic UL94V-0 color : black
- ●Applicable cable
  AWG#36~42 Coaxial cable
  AWG#32 Discrete wire

KB504- 40 H 3 A

Pin No. / Housing / Version / Mold No.

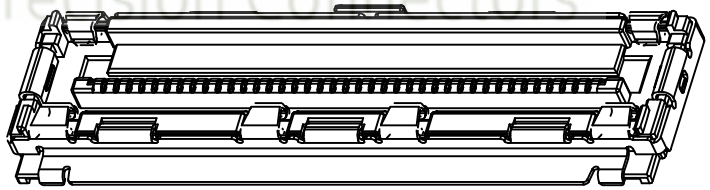

XYCO Precision Connectors

					TOLERANCE 公 差	DRAWING 設計者	John	KB504-40H3A				
2013-04-15	A		KB504-40H3A	John	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號		UNIT 單位	mm	PRODUCT NAME 產品名稱
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE1205A			HONDA LVD PH0.5mm connector

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn