
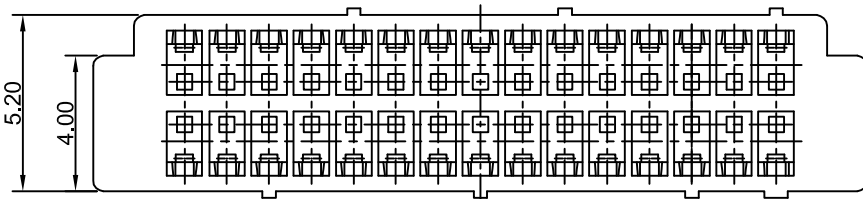

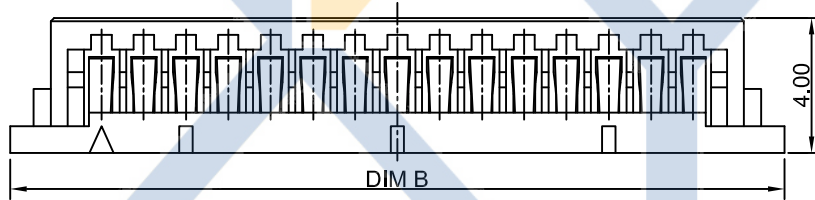


DRAWING FOR CUSTOMER

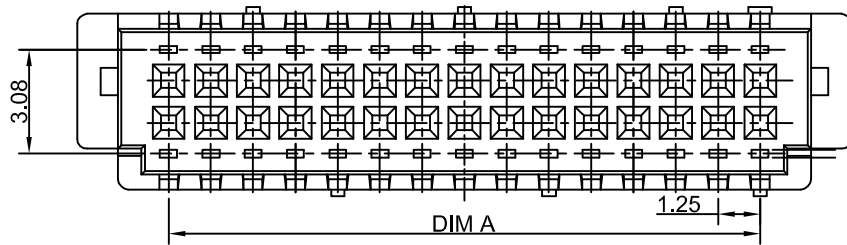

- SPEC.:
- Rated Voltage:150V AC,DC
- Rated Current:1A AC,DC
- Withstand Voltage:300V AC/minute
- Contact Resistance:30mΩ max
- Insulation Resistance:500MΩ min
- Temperature Range:-40℃~+85℃
- Applicable wire:AWG#28~32

- Housing
- Material:PA66 UL94-V0
- QTY.:500PCS/Plate

KB911-D X X H 2 A

Double row
Pin No.
Housing

Version
Mold No.

Precision Connectors

Cir-Cuits	A	B
05*2	5.00	10.40
10*2	11.25	16.65
15*2	17.50	22.90
20*2	23.75	29.15

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	TOLERANCE 公差	DRAWING 設計者	John	KB911-DXXH2A
2013-06-21	A		KB911-DXXH2A	John	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
						APPROVED 核准	William	DWG NO. 圖號
								PE2802A

UNIT 單位	mm	PRODUCT NAME 產品名稱	HRS DF13 PH1.25mm Wire To Board Double row Housing