DRAWING FOR CUSTOMER

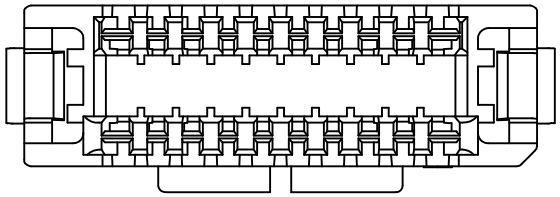

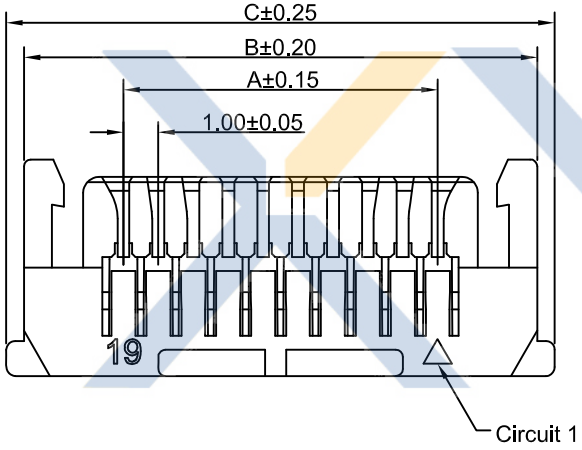

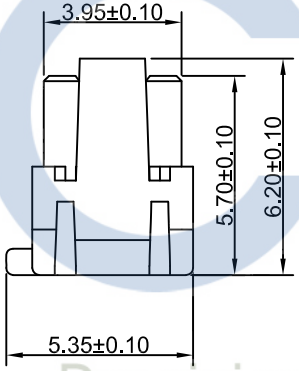

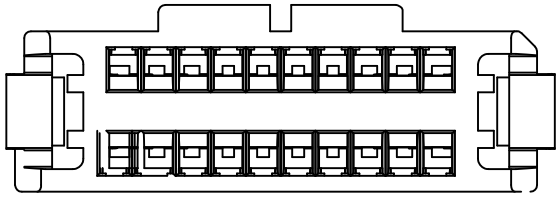

■Specifications:
- ●Rated Voltage: 50V AC,DC
- ●Rated Current: 1A AC,DC
- ●Withstand Voltage: 500V AC/minute
- ●Contact Resistance: 30mΩ (MAX.)
- ●Insulation Resistance: 100MΩ (MIN.)
- ●Temperature Range: -25°C~+85°C

■Material and Finish:
- ●Material: PA66 UL94V-0

KB905- D XX H L 2 A

- Double row
- Pin No.
- Housing
- With Lock
- Mold No.
- Version

XYCO Precision Connectors

Dimensional & Ordering Information:

Poles	Part No	Dimension mm		
		A	B	C
20	KB905-D20HL2A	9.00	14.70	15.70
30	KB905-D30HL2A	14.00	19.70	20.70
40	KB905-D40HL2A	19.00	24.70	25.70
50	KB905-D50HL2A	24.00	29.70	30.70

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2014-06-05	A		KB905-DXXHL2A	John

TOLERANCE 公 差: .X=±0.30, .XX=±0.20, .XXX=±0.10

DRAWING 設計者: John
CHECKED 審查: Thomas
APPROVED 核准: William

KB905-DXXHL2A

PART NO. 料號

DWG NO. 圖號: PE1809015A

UNIT 單位: mm

PRODUCT NAME 產品名稱: JST SHLDP Pitch 1.0mm wire to board Housing with lock,Double row

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn