




DRAWING FOR CUSTOMER

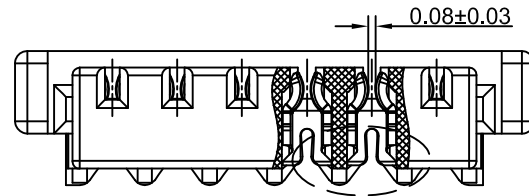




SECTION A-A

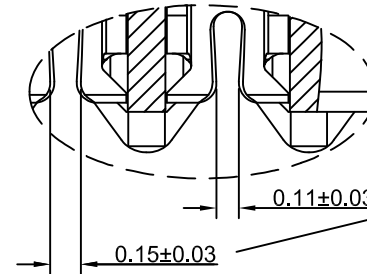

SECTION A-A
SCALE 2.5:1

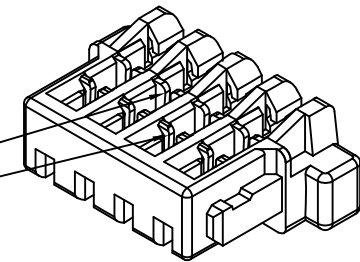

3D VIEW

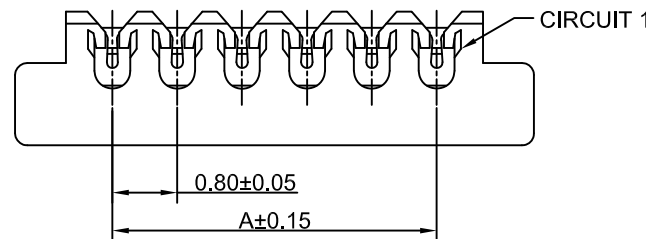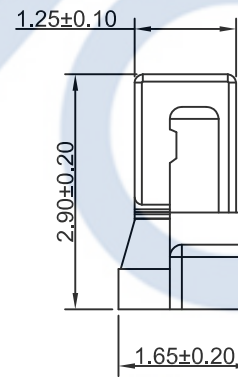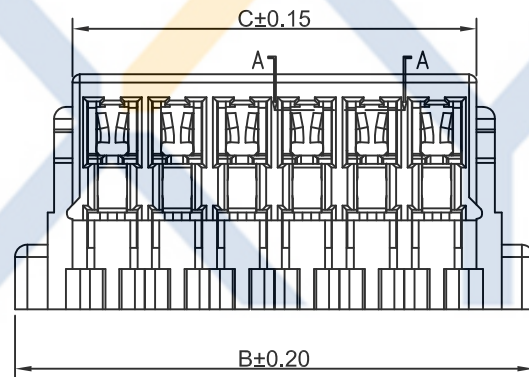

Specifications
 Current rating: 0.5A AC, DC
 Voltage rating: 30V AC, DC
 Temperature range: -25°C~+85°C
 Insulation resistance: 100MΩ/min.
 Withstanding voltage: 200V AC/minute
 Contact resistance: 20mΩ/max.
 Mates with KB801-XXXSRXX
 Material:
 Insulator: NYLON46, UL94V-0
 Contact: Phosphor Bronze
 Plated: Au-plated 1u", over Ni

KB801-XXHEXXTXA
 Pin No. _____
 Housing _____
 Ear _____
 10: Tin plated
 11: Gold plated

Version _____
 Mold No. _____
 Terminal _____

Circuits Part No.	DIMENSIONS		
	A	B	C
2P	0.80	3.20	1.78
3P	1.60	4.00	2.58
4P	2.40	4.80	3.38
5P	3.20	5.60	4.18
6P	4.00	6.40	4.98
7P	4.80	7.20	5.78
8P	5.60	8.00	6.58
9P	6.40	8.80	7.38
10P	7.20	9.60	8.18
11P	8.00	10.40	8.98
12P	8.80	11.20	9.78
13P	9.60	12.00	10.5
14P	10.40	12.80	11.3
15P	11.20	13.60	12.1
16P	12.00	14.40	12.9
17P	12.80	15.20	13.7
18P	13.60	16.00	14.5
19P	14.40	16.80	15.3
20P	15.20	17.60	16.1
21P	16.00	18.40	16.9
22P	16.80	19.20	17.7
23P	17.60	20.00	18.5
24P	18.40	20.80	19.3

2012-05-09		A	KB801-XXHEXXTXA		John	TOLERANCE 公差		DRAWING 設計者 John		KB801-XXHEXXTXA		XYCO PRECISION CONNECTORS		TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者	APPROVED 核准	DWG NO. 圖號	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	THOMAS	PART NO. 料號	UNIT 單位	mm	PRODUCT NAME 產品名稱	JST SUR PH0.8mm Wire To Board connector ear	
1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16