




DRAWING FOR CUSTOMER


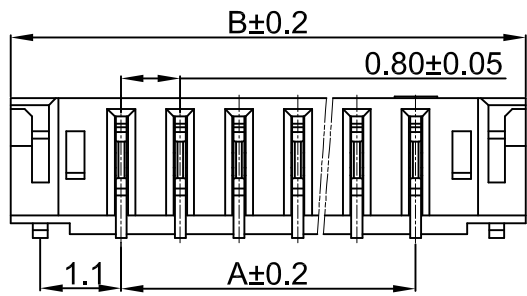


Specifications:


- Rated Voltage: 30V AC,DC
- Rated Current: 0.5A
- Withstand Voltage: 200V AC/minute
- Contact Resistance: 20mΩ, (MAX.)
- Insulation Resistance: 100MΩ, (MIN.)
- Temperature Range: -25°C~+85°C

Material and Finish:

- Material: LCP UL94-V0
- Contact PIN: Phosphor Bronze
- Solder tab: Phosphor Bronze

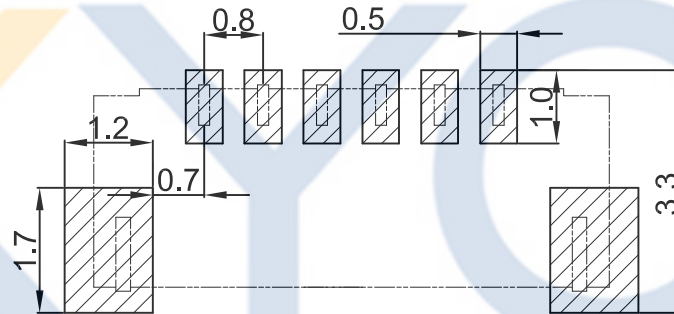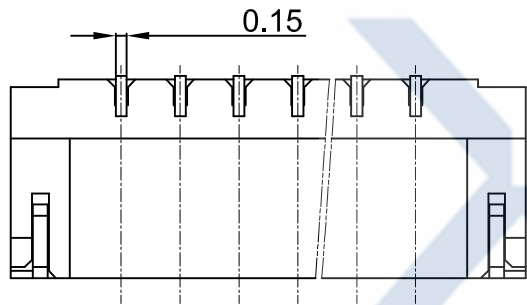

P.C.B LAYOUT

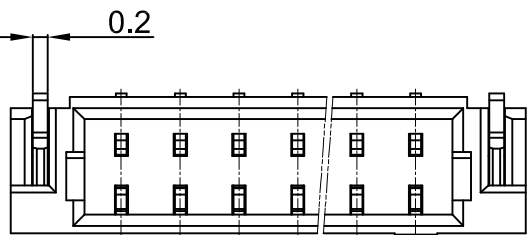

KB801-XXXSR S5A

Pin No.

P:PE 袋装
R:REEL 卷装
T:TUBE 管装
S:SMT
D:DIP

Version
Mold No.

G:GOLD FLASH
S:MATTE TIN
R:Right angle
V:Verical

Pin No.	Dimension mm		Pin No.	Dimension mm	
	A	B		A	B
02P	0.8	3.8	14P	10.4	13.4
03P	1.6	4.6	15P	11.2	14.2
04P	2.4	5.4	16P	12.0	15.0
05P	3.2	6.2	17P	12.8	15.8
06P	4.0	7.0	18P	13.4	16.4
07P	4.8	7.8	19P	14.2	17.2
08P	5.6	8.6	20P	15.0	18.0
09P	6.4	9.4	21P	15.8	18.8
10P	7.2	10.2	22P	16.6	19.6
11P	8.0	11.0	23P	17.4	20.4
12P	8.8	11.8	24P	18.2	21.2
13P	9.6	12.6	25P	19.0	22.0

XYCO PRECISION CONNECTORS

TEL: 0769-8297 9981/2/3 <http://www.XYCO.com.cn>

DATE		VER	CHANGE HISTORY	CHANGED NAME	DRAWING	TOLERANCE	DRAWING	DESIGNER	PART NO.
日期		版本	變更歷史	修改後料號	變更者	公差	設計者	料號	料號
2016-11-30		A		KB801-XXXSR S5A	John	.X=±0.30 .XX=±0.20 .XXX=±0.10	John	KB801-XXXSR S5A	KB801-XXXSR S5A
							Thomas		
							William		

UNIT	mm	PRODUCT NAME
單位	mm	產品名稱
		PH0.8mm SMT Right Angle Wafer