DRAWING FOR CUSTOMER

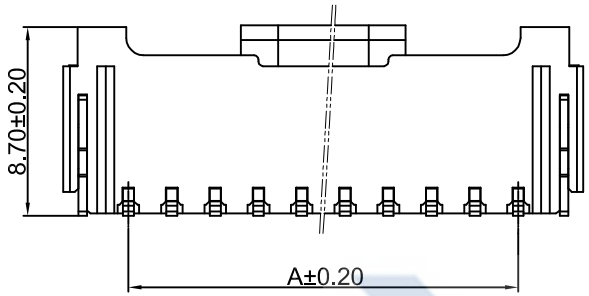

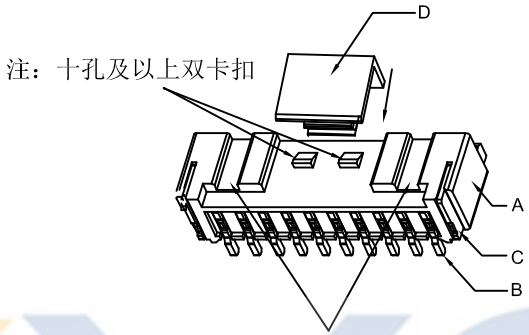



■SPEC.:
- Rated Voltage:250V AC,DC
- Rated Current:3A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

■Material:
- Insulator(A):PA6T UL94V-0
- Contact Pin(B): Brass
  Finish:Tin-plated;over Nickel
- Solder Tab(C):Brass
  Finish:Tin-plated,over Nickel
- CAP(D):PA6T UL94V-0

KB934-XX X S V 6 A

- Pin No.
- T:TUBE（管装）
  R:REEL（卷装）
  P:P E （袋装）
- D:DIP
  S: SMT
- R:Right Angle
  V:Vertical
- Mold No.
- Version

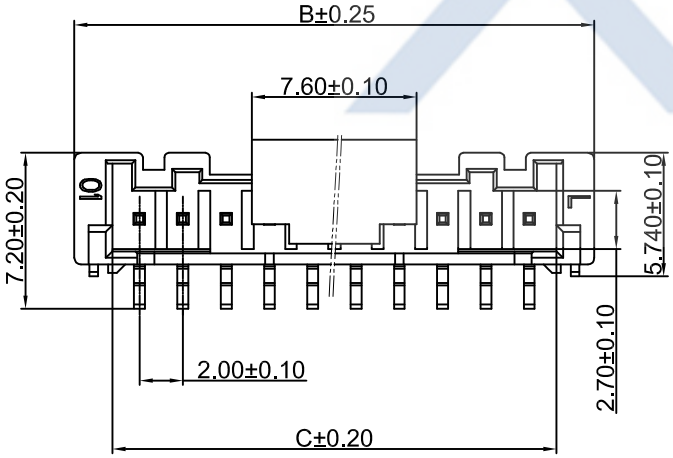

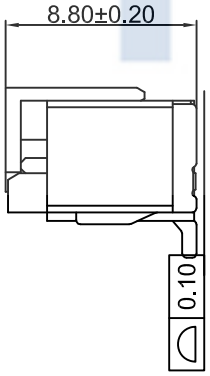

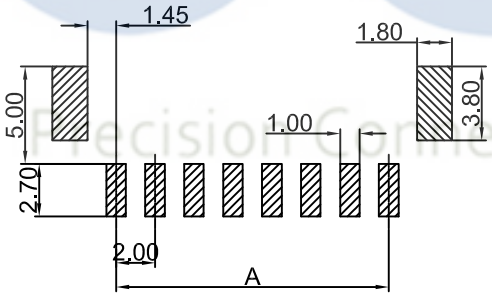

PCB LAYOUT

Poles	Dimensions(mm)		
	A	B	C
02	2.00	8.00	4.55
03	4.00	10.00	6.55
04	6.00	12.00	8.55
05	8.00	14.00	10.55
06	10.00	16.00	12.55
07	12.00	18.00	14.55
08	14.00	20.00	16.55
09	16.00	22.00	18.55
10	18.00	24.00	20.55
11	20.00	26.00	22.55
12	22.00	28.00	24.55
13	24.00	30.00	26.55
14	26.00	32.00	28.55
15	28.00	34.00	30.55

XYCO Precision Connectors

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2016-08-12	A		KB934-XXXSV6A	Devin

TOLERANCE 公 差	DRAWING 設計者	Devin	KB934-XXXSV6A
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Thomas	PART NO. 料號
	APPROVED 核准	William	DWG NO. 圖號 PE1903013A

UNIT 單位	mm	PRODUCT NAME 產品名稱	PA2.0mm Wire To Board SMT Vertical Wafer