

DRAWING FOR CUSTOMER



- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:2A AC,DC
 - Withstand Voltage:800V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator:B1-PA66 UL94V-0
NB1-PA66 UL94V-0 HF
 - Color:WH-White


XY20011-XXHL1A-NB1X-WH

Pin No.	Color
Housing	XYCO
With Lock	Material
Mold No.	Version



Poles	Dimensions(mm)		
	A	B	C
02	2.00	4.60	5.60
03	4.00	6.60	7.60
04	6.00	8.60	9.60
05	8.00	10.60	11.60
06	10.00	12.60	13.60
07	12.00	14.60	15.60
08	14.00	16.60	17.60
09	16.00	18.60	19.60
10	18.00	20.60	21.60
11	20.00	22.60	23.60
12	22.00	24.60	25.60
13	24.00	26.60	27.60
14	26.00	28.60	29.60
15	28.00	30.60	31.60

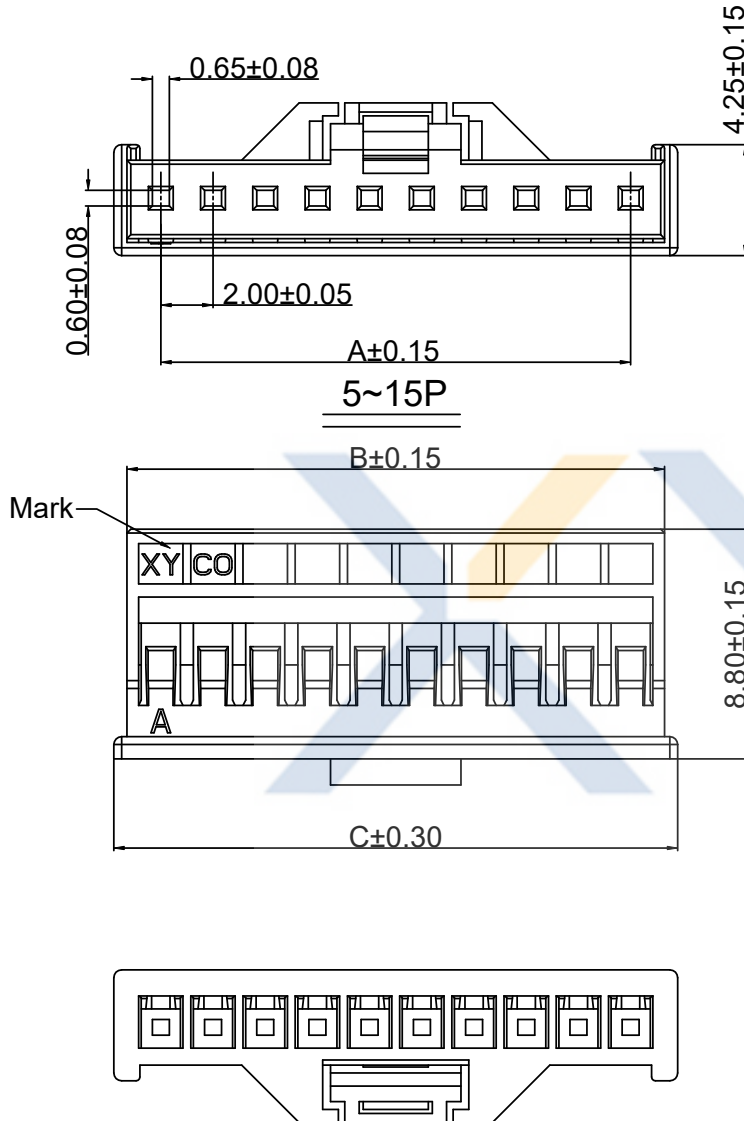

4P



2~3P

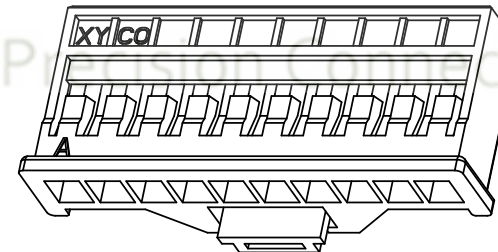

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981 <http://www.XYCO.com.cn>

					TOLERANCE 公差	DRAWING 設計者	Devin	XY20011-XXHL1A-NB1X-WH	
2024-03-18	A		XY20011-XXHL1A-NB1X-WH	Devin	.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Leo Li	PART NO. 料號	
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者		APPROVED 核准	William	DWG NO. 圖號	PE240315A

UNIT 單位	mm	PRODUCT NAME 產品名稱	PH2.00mm Wire To Board Single Row Housing With Lock
------------	----	----------------------	--