

# DRAWING FOR CUSTOMER

## ■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:2A AC,DC
- Withstand Voltage:800V AC/minute
- Contact Resistance:20mΩ max
- Insulation Resistance:1000MΩ min
- Temperature Range:-25℃~+85℃

## ■Terminal

- Material:Phosphor Bronze
- Finish:Tin-plated,over Nickel
- Applicable wire:AWG#24~30
- QTY.:12KPCS/Reel

XY20011-XXXT1A

1:All plated  
2:Half plated




Plating

0: Tin-plat  
1: Gold Flash  
2: Gold Plat3U"  
3: Gold Plat5U"  
10: Gold Plat10U"  
15: Gold Plat15U"


Version

Mold No.


Terminal

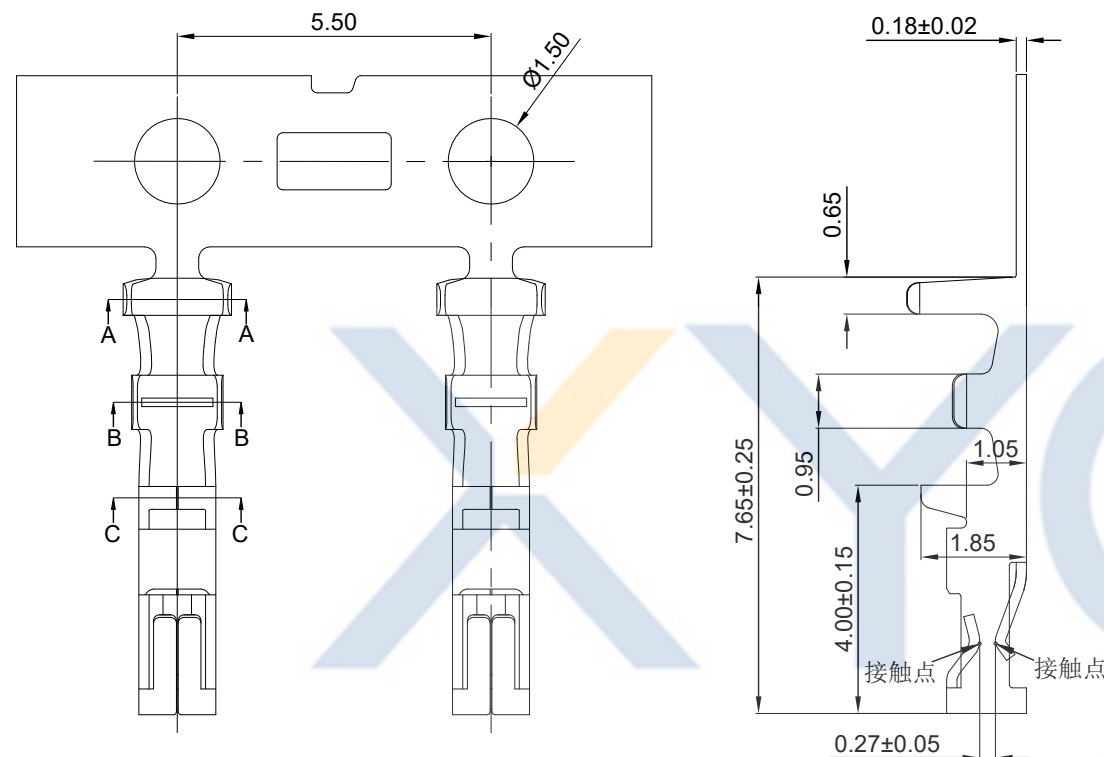

Section:C-C



Section:B-B



Section:A-A

**XYCO** 东莞市轩业电子科技有限公司  
TEL: 0769-8297 9981 <http://www.XYCO.com.cn>

| DATE<br>日期 | VER<br>版本 | CHANGE HISTORY<br>變更歷史 | CHANGED NAME<br>修改後料號 | DRAWING<br>變更者 | TOLERANCE<br>公差                     | DRAWING<br>設計者 | Devlin  | XY20011-XXT1A | UNIT<br>單位 | mm | PRODUCT NAME<br>產品名稱 | PH2.0mm Wire To Board PH2.0<br>Terminal |
|------------|-----------|------------------------|-----------------------|----------------|-------------------------------------|----------------|---------|---------------|------------|----|----------------------|-----------------------------------------|
| 2024-03-18 | A         |                        | XY20011-XXT1A         | Devlin         | .X=±0.30<br>.XX=±0.20<br>.XXX=±0.10 | CHECKED<br>審查  | Leo Li  | PART NO. 料號   |            |    |                      |                                         |
|            |           |                        |                       |                |                                     | APPROVED<br>核准 | William | DWG NO.<br>圖號 | PE240318A  |    |                      |                                         |