

DRAWING FOR CUSTOMER

■SPEC.:

- Rated Voltage:250V AC,DC
- Rated Current:5A AC,DC
- Withstand Voltage:1500V AC/minute
- Insulation Resistance:1000MΩ min
- Contant Resistance:15mΩ Max.
- Temperature Range:-25℃~+85℃

■Notes:

- Insulation Material(A):P7-PA10T UL94-V0
Color;BK-Black
- Contact Material(B):Phosphor Bronze
- Plating:Matted Tin-plated;Over Nikel-plated

KB9301-XX X D R 5 A -P7 -BK

Pin No.

包装方式:

T:TUBE (管装)

R:REEL (卷装)

P: PE (袋装)

A:TRAY (盒装)

S:SMT

D:DIP

Color





Material

Version

Mold No.

R:Right Angle

V:Vertical

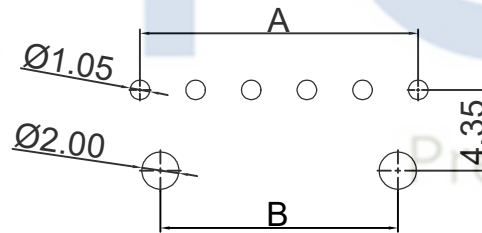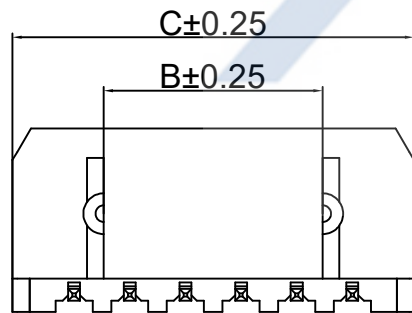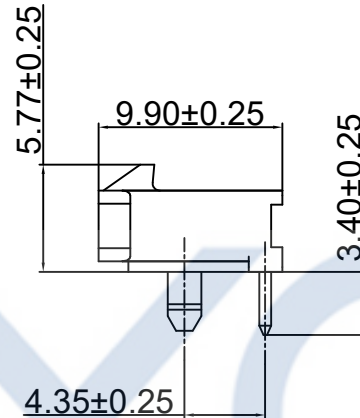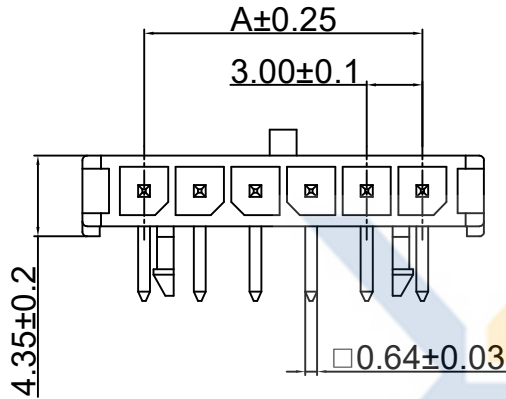

Board Layout

General Tolerance:±0.05

| Poles | Dimensions | | |
|-------|------------|-------|-------|
| | A | B | C |
| 02 | 3.00 | 1.15 | 9.70 |
| 03 | 6.00 | 1.15 | 12.70 |
| 04 | 9.00 | 5.80 | 15.70 |
| 05 | 12.00 | 8.80 | 18.70 |
| 06 | 15.00 | 11.80 | 21.70 |

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981 http://www.XYCO.com.cn

| | | | | | | | | | | | | | | |
|------------|-----------|-----------------------|------------------------|----------------------|-------|-----------------|-------------------------------------|---------------|----------------------|-------------|------------|----|----------------------|---|
| 2016-08-10 | | A | CHANGE HISTORY 變更歷史 | KB9301-XXXDR5A-P7-BK | Devin | TOLERANCE 公差 | DRAWING 設計者 | Devin | KB9301-XXXDR5A-P7-BK | | UNIT 單位 | mm | PRODUCT NAME 產品名稱 | PH3.0mm Single Row DIP Right Angle Wafer |
| DATE 日期 | VER 版本 | CHANGED NAME 修改後料號 | | | | DRAWING 變更者 | .X=±0.30 .XX=±0.20 .XXX=±0.10 | CHECKED 審查 | Leo Li | PART NO. 料號 | | | | |
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | | | | | | |