DRAWING FOR CUSTOMER

KB901- XX H 6 A -X

- Pin No.
- Housing
- Mold No.
- Version
- XYCO

■Specifications:
- ●Rated Voltage: 50V AC,DC
- ●Rated Current: 1A AC,DC
- ●Withstand Voltage: 500V AC/minute
- ●Contact Resistance: 20mΩ, (MAX.)
- ●Insulation Resistance: 100MΩ, (MIN.)
- ●Temperature Range: -25°C~+85°C

■Material:
- ●Insulator: KB901- XXH6A-X(PBT UL94V-0)/
  KB901- XXH6A-HF-X(PA66 UL94V-0)
  Color: White

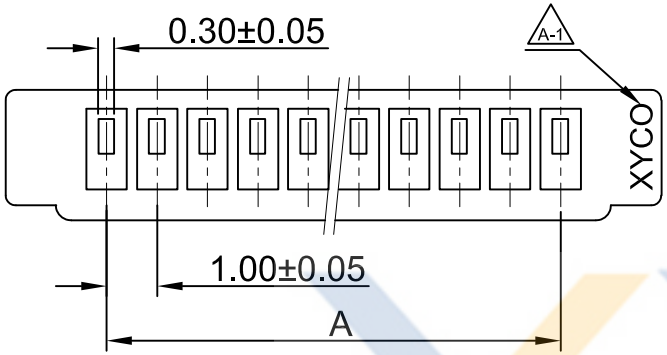

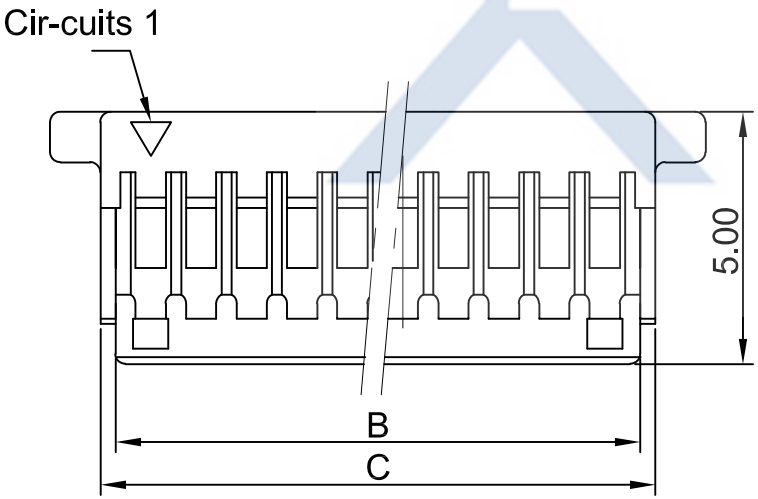

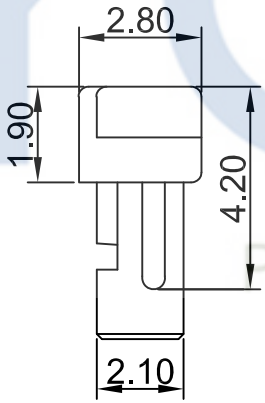

Poles	Dimensions(mm)		
	A	B	C
02	1.00	2.40	3.00
03	2.00	3.40	4.00
04	3.00	4.40	5.00
05	4.00	5.40	6.00
06	5.00	6.40	7.00
07	6.00	7.40	8.00
08	7.00	8.40	9.00
09	8.00	9.40	10.00
10	9.00	10.40	11.00
11	10.00	11.40	12.00
12	11.00	12.40	13.00
13	12.00	13.40	14.00
14	13.00	14.40	15.00
15	14.00	15.40	16.00
16	15.00	16.40	17.00
17	16.00	17.40	18.00
18	17.00	18.40	19.00
19	18.00	19.40	20.00
20	19.00	20.40	21.00

XYCO Precision Connectors

DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者
2021-11-03	A-1	增加带Mark款 A-1	KB901-XXH6A-HF-X	Devin
2013-06-05	A		KB901-XXH6A-X	Devin

TOLERANCE 公 差: .X=±0.30 .XX=±0.20 .XXX=±0.10

DRAWING 設計者: Devin
CHECKED 審查: Thomas
APPROVED 核准: William

KB901-XXH6A-X

PART NO. 料號

DWG NO. 圖號: PE200101A

UNIT 單位: mm

PRODUCT NAME 產品名稱: SH1.0mm Wire To Board Housing

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981/2/3 http://www.XYCO.com.cn