
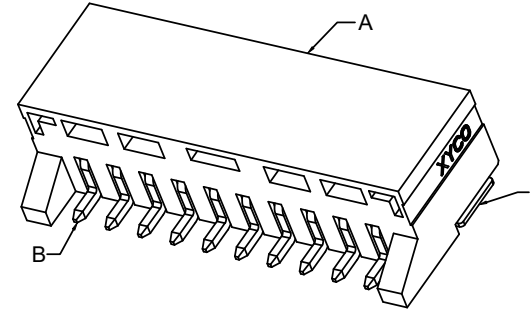
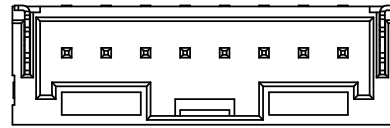



DRAWING FOR CUSTOMER

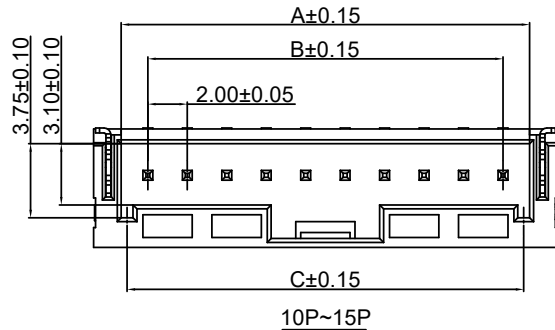

- SPEC.:
- Rated Voltage:250V AC,DC
 - Rated Current:2A AC,DC
 - Withstand Voltage:800V AC/minute
 - Contact Resistance:20mΩ max
 - Insulation Resistance:1000MΩ min
 - Temperature Range:-25℃~+85℃

- Material:
- Insulator(A):C1-LCP UL94V-0
Color:BGE-Beige
 - Contact PIN(B): Phosphor Bronze
Finish:Sn-Plated,over Nickel
 - Solder Tab(C):Phosphor Bronze
Finish:Sn-Plated,over Nickel

XY20011- XX X S R S 1 A -C1 X-BGE

Pin No.

包裝方式:

T:TUBE (管裝)

R:REEL (卷裝)

P: PE (袋裝)

S:SMT

D:DIP

R:Right Angle

V:Vertical

Color

XYCO






Material

Version

Mold No.

G:Gold flash Plated

S: Sn-Plated

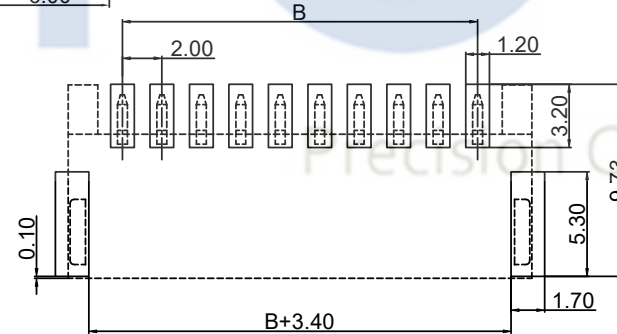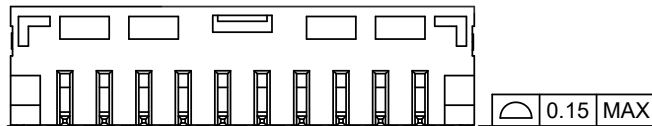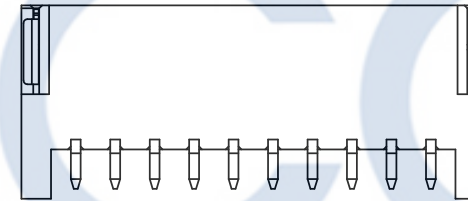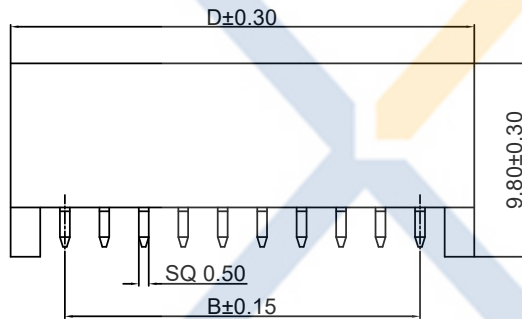

RECOMMENDED P.C.B LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

Poles	Dimensions(mm)			
	A	B	C	D
02	4.70	2.00	4.10	7.50
03	6.70	4.00	6.10	9.50
04	8.70	6.00	8.10	11.50
05	10.70	8.00	10.10	13.50
06	12.70	10.00	12.10	15.50
07	14.70	12.00	14.10	17.50
08	16.70	14.00	16.10	19.50
09	18.70	16.00	18.10	21.50
10	20.70	18.00	20.10	23.50
11	22.70	20.00	22.10	25.50
12	24.70	22.00	24.10	27.50
13	26.70	24.00	26.10	29.50
14	28.70	26.00	28.10	31.50
15	30.70	28.00	30.10	33.50

XYCO 东莞市轩业电子科技有限公司
TEL: 0769-8297 9981 <http://www.XYCO.com.cn>

2024-03-18	A		XY20011-XXXSRS1A-C1X-BGE	Devin
DATE 日期	VER 版本	CHANGE HISTORY 變更歷史	CHANGED NAME 修改後料號	DRAWING 變更者

TOLERANCE 公差	DRAWING 設計者	Devin
.X=±0.30 .XX=±0.20 .XXX=±0.10	CHECKED 審查	Leo Li
	APPROVED 核准	William

XY20011- XXXSRS1A-C1X-BGE	
PART NO. 料號	
DWG NO. 圖號	PE240317A

UNIT 單位	mm	PRODUCT NAME 產品名稱	PH2.00mm Wire To Board Single Row SMT Right Angle Wafer
------------	----	----------------------	--